



**APPLICATIONS:**

- General lighting High mast, Industrial parks, Railway yards, car parks Sport arena, Gardens etc.

**INSTALLATION:**



- Cradle with mounting holes.

**SPECIFICATION:**

- **Housing:** Single piece pressure die cast powder coated housing.
- **Frame:** Single piece pressure die cast powder coated frame.
- **Visor:** Toughened glass.
- **Gasket:** Synthetic gasket.
- **Driver:** Integrated constant current driver.
- **Hardware:** S.S Hardware
- **Ingress Protection: IP65.**

**FEATURES:**

- Optimized LED orientation for better light distribution.
- Optics equipped with secondary lens for greater light control and distribution.
- Better heat dissipation.
- Separate lamp and driver compartment  
Driver compartment is to be maintained from back for ease of maintenance
- High efficiency thermal design.
- Integrated constant current driver.
- Operating temperature -10°C to 50°C.
- Wide spread of light to cover maximum area

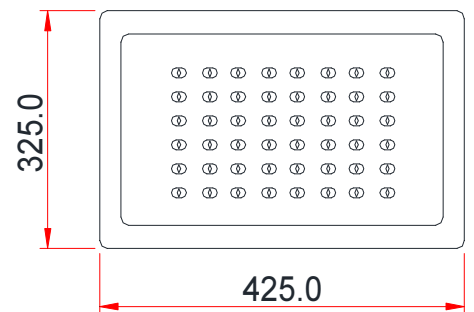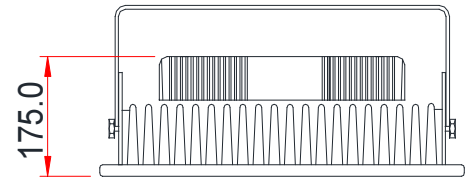

**ELECTRICAL PARAMETER:**

Nominal Dimension in mm, Tolerance +/- 2mm

Product Code	Cat Ref	Voltage (V)	Input Power (W)	Color Temp °K	Color Rendering (Ra)	Power Factor
PAR0201023	PCGLF C2 01 180	240	180	5500	> 70	> 0.95
PAR0201024	PCGLF C2 01 200	240	200	5500	> 70	> 0.95