


APPLICATIONS:

- Industrial plants, Assembly workshops, Power plants, Canopy, Railway Concourse.

INSTALLATION:

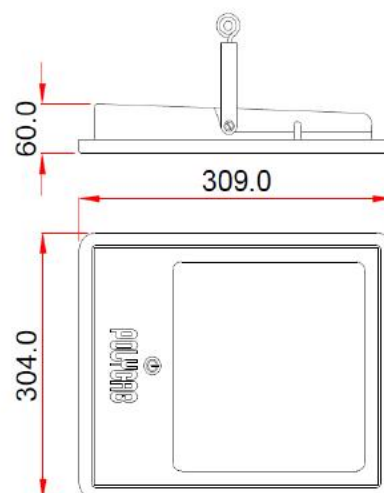
- Mounting with eye bolt

SPECIFICATION:

- **Housing:** Single piece pressure die cast powder coated housing.
- **Frame:** Single piece pressure die cast powder coated frame.
- **Visor:** Toughened glass.
- **Gasket:** Synthetic gasket.
- **Driver:** Constant current driver.
- **Hardware:** S.S Hardware
- **Ingress Protection:** IP65.

FEATURES:

- Optimized LED orientation for better light distribution.
- High efficiency thermal design.
- Operating temperature 0°C to 50°C.
- Wide spread of light to cover maximum area


ELECTRICAL PARAMETER:

Nominal Dimension in mm, Tolerance +/- 5mm

Cat Ref	Voltage (V)	Input Power (W)	Color Temp °K	Color Rendering (Ra)	Power Factor
PCGLFH T1 150	240	150	5700	> 70	> 0.95