



APPLICATIONS:

- Modern streets for urban areas, Industrial parks, Street lights, Flyovers landscape and open parking etc.

INSTALLATION:



- Suitable up to 50mm OD pipe mounting.

SPECIFICATION:

- **Housing:** Single piece pressure die cast powder coated housing.
- **Frame:** Single piece pressure die cast powder coated frame.
- **Visor:** Toughened glass cover.
- **Gasket:** Synthetic gasket.
- **Hardware:** S.S hardware.
- **Ingress Protection: IP66.**

FEATURES:

- Optimized LED orientation for better light distribution.
- Optics equipped with secondary lens for greater light control and distribution.
- Better heat dissipation.
- Separate lamp and driver compartment
Driver compartment to be maintain from top for ease of maintenance
- High efficiency thermal design.
- Operating temperature 0°c to 50°c
- Integrated constant current driver.
- Wide spread of light to cover maximum area.

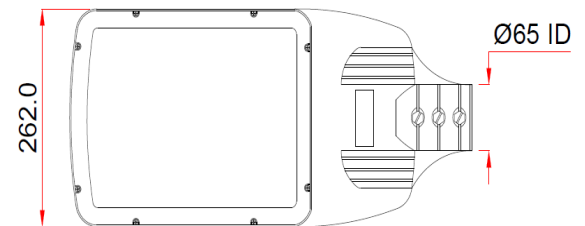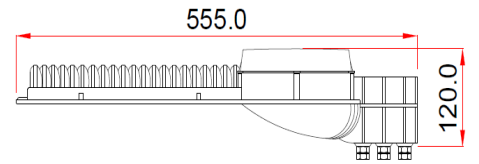

ELECTRICAL PARAMETER:

Nominal Dimension in mm, Tolerance +/- 2mm

Product Code	Cat Ref	Voltage (V)	Input Power (W)	Color Temp °K	Color Rendering(Ra)	Power Factor
PUB0505016	PCGLS T1 120	240	120	5700K	> 70	>0.95
PUB0505017	PCGLS T1 150	240	150	5700K	> 70	>0.95