



APPLICATIONS:

- Modern streets for urban areas, Industrial parks, Street lights, landscape and open parking etc.

INSTALLATION:


- Suitable up to 40mm OD pipe mounting.

SPECIFICATION:

- **Housing:** Single piece pressure die cast powder coated housing.
- **Frame:** Single piece pressure die cast powder coated frame.
- **Visor:** Toughened glass cover.
- **Gasket:** Synthetic gasket.
- **Hardware:** S.S hardware.
- **Ingress Protection: IP66.**

FEATURES:

- Optimized led orientation for better light distribution.
- Better heat dissipation.
- High efficiency thermal design.
- Integrated constant current driver.
- Operating temperature 0°C to 50°C.
- Wide spread of light to cover maximum area.

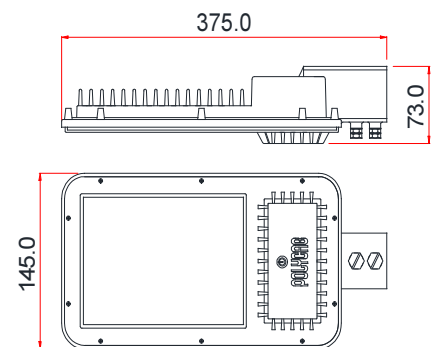

ELECTRICAL PARAMETER:

Nominal Dimension in mm, Tolerance +/- 2mm

Product Code	Cat Ref	Voltage (V)	Input Power (W)	Color Temp °K	Color Rendering(Ra)	Power Factor
PUB0505009	PCGLS T1 35	240	35	5700	> 70	>0.9
PUB0505010	PCGLS T1 40	240	40	5700	> 70	>0.9
PUB0505011	PCGLS T1 45	240	45	5700	> 70	>0.9
PUB0505012	PCGLS T1 50	240	50	5700	> 70	>0.9