

**PCGLS T1 90**  
LED STREET LIGHT WITH TOP DRIVER MAINTENANCE



**APPLICATIONS:**

- Modern streets for urban areas, Industrial parks, Street lights, Flyovers landscape and open parking etc.

**INSTALLATION:**



- Suitable up to 50mm OD pipe mounting.

**SPECIFICATION:**

- **Housing:** Single piece pressure die cast powder coated housing.
- **Frame:** Single piece pressure die cast powder coated frame.
- **Visor:** Toughened glass cover.
- **Gasket:** Silicon gasket.
- **Hardware:** S.S hardware.
- **Ingress Protection: IP66.**

**FEATURES:**

- Optimized LED orientation for better light distribution.
- Optics equipped with secondary lens for greater light control and distribution.
- 10 KV external surge protection
- Separate lamp and driver compartment  
Driver compartment to be maintain from top for ease of maintenance
- High efficiency thermal design.
- Operating temperature 0°c to 50°c
- Integrated constant current driver.
- Wide spread of light to cover maximum area.

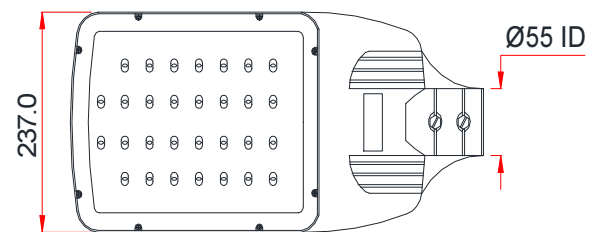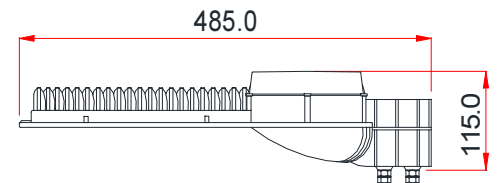

**ELECTRICAL PARAMETER:**

Nominal Dimension in mm, Tolerance +/- 2mm

Product Code	Cat Ref	Voltage (V)	Input Power (W)	Color Temp °K	Color Rendering(Ra)	Power Factor
PUB0505015	PCGLS T1 90	240	90	5700K	> 70	>0.95

**CORPORATE OFFICE**

POLYCAB WIRES PVT.LTD.

Polycab House771,Mogul Lane Mahim (W) Mumbai 400 016,India – Tel +91 22 2432 7070 -74 Email [info@polycab.com](mailto:info@polycab.com)